




- ① INSTALL PARALLEL 30" HDPE PIPES
- ② INSTALL 6" THICK GRAVEL OVER GEOTEXTILE FABRIC. APRON SIZE 16' X 16'
- ③ INSTALL TEMPORARY 6" THICK 3/4" GRAVEL ROAD
- ④ REMOVE COLLAPSED ASPHALT ROAD, K- RAILS, CLAY PIPES AND RIP RAP AND RE-ESTABLISH CHANNEL SIDE SLOPES AND BOTTOM AND PLACE RIP RAP AT PIPE ENTRANCE AND EXIT
- ⑤ INSTALL 2" GAS LINE PER SOUTHERN CALIFORNIA GAS CO. REQUIREMENTS


DEMOLITION
NOTE:
REMOVE RIP-RAP, K-RAILS AND DEBRIS
WITHIN WORK AREA. RE-ESTABLISH ELEVATIONS
WITHIN WORK AREA WITH DOCUMENTED FILL
MATERIAL.




Know what's below.
Call before you dig.

IMPORTANT NOTICE

SECTION 4216/4217 OF THE GOVERNMENT CODE
REQUIRES A DIG ALERT IDENTIFICATION NUMBER
BE ISSUED BEFORE A "PERMIT TO EXCAVATE"
WILL BE VALID. FOR YOUR DIG ALERT I.D. NUMBER
CALL UNDERGROUND SERVICE ALERT
TOLL FREE 1-800-422-4133
TWO WORKING DAYS BEFORE YOU DIG

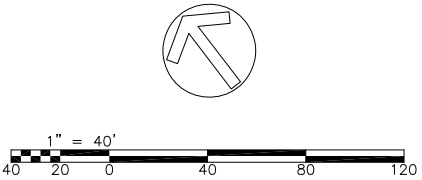

			THESE PLANS HAVE BEEN REVIEWED FOR COMPLIANCE WITH THE APPROPRIATE CONDITIONS OF DEVELOPMENT AND/OR CITY AND STATE LAWS AND HAVE BEEN FOUND ACCEPTABLE	<div></div> <div>PREPARED BY: <i>Remon Habib</i> REMON HABIB, RCE No. 83156</div> <div>6/11/2018 DATE</div>	BENCHMARK: RIV. CO. BM: EL-3.0-80 DATUM: NGVD 29 ELEV: 1264.89FT	CITY OF LAKE ELSINORE MACHADO/LARSON REPAIRS PLAN SHEET	SHEET 1 OF 1 SHEETS CITY PROJECT NO. 19-01